



DIREKTRONIK

Stretch HDMI™

User's Manual

25-0381 - HDFC-200D

Manual Contents

Manual Contents	1-0
Welcome! Product Description	1-1
System Requirements for Setup	1-2
Installation	1-3
Troubleshooting, Maintenance, Technical Support	1-4
Product Specifications	1-5
Warranty Information	1-6

Pictorials

Figure 1 – General connection diagram of HDFC-200D 1-1

Welcome!

Congratulations on your purchase of the **Stretch HDMI™** HDFC-200D, Detachable Active Optical Cable for HDMI 2.0. This manual contains information that will assist you in installing and operating the product.

Product Description

Shipping Group

- **HDFC-200D, HDMI 2.0 Detachable Active Optical Cable:** One (1) unit, length as your inquire.
- **User's Manual**

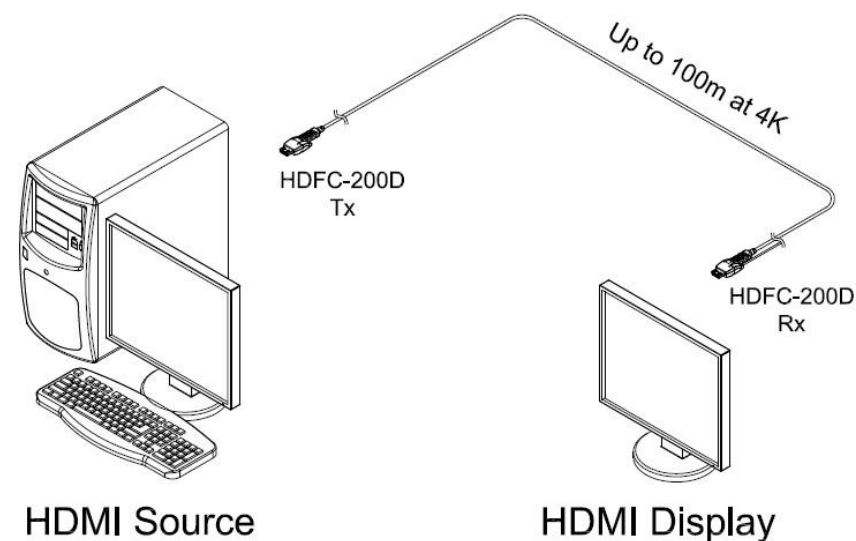


Figure 1 – General connection diagram of HDFC-200D

System Requirements for Setup

- **Hardware requirements**
 - You have to have a HDMI display source (Media player, PC or laptop). It should support the maximum graphic resolution feature of Display (TV, Monitor or Projector) to be connected.
 - No special requirements memory size, CPU speed and chipsets, if you've already properly installed your HDMI systems.
- **Software requirements**
 - No special restrictions, if you've already properly installed your HDMI systems.
- **AC/DC Power Adapter Technical Advisory**

The HDFC-200D is designed to use +5V internal power supplied through a HDMI pin (#18) on the graphic source port. However, HDFC-200D requires USB power supply on RX side to power up.

**Note that if either of Display source or Display does not support HDMI 2.0 standard, HDFC-200D would not transmit HDMI 2.0 signal. Just like copper cable, transmitting information will follow lower resolution of the two.
(Example: 4K Display source – 2K Display → 2K resolution,
2K Display source – 4K Display → 2K resolution)**

Warning

Do not connect micro HDMI connector, which is place on the end part of core cable, directly to any micro HDMI receptacle other than HDFC-200D body part. Using micro HDMI connector without HDFC-200D connector will damage cable and/or HDMI devices.

Installation

Important: Please use the installation procedure below. Improper or no operation may result if the start-up sequence is not correctly followed.

Step 1

Unpack the contents of the shipping group.

Step 2

Connect both connector and cable of HDFC-200D if they are not engaged with each other.

Step 3

Plug USB connector of RX side to USB port of a display and check the blue LED of RX is ON.

Step 4

Plug the HDMI plug of the RX side of HDFC-200D into the HDMI receptacle of a Display.

Step 5

Plug directly the HDMI plug of the TX side of HDFC-200D into the HDMI receptacle of HDMI source (Media player, PC or laptop), and check if LED of TX side is ON

Step 6

If the system does not work properly, go to page 1-4, trouble shooting.

Note: Opticis does **NOT** recommend customer to use any intermediate cable or adapter between them. It may deteriorate the signal transmission performance.)

Note: If there is no display after Step 5, kindly unplug either TX or RX side of HDFC-200D and re-plug them back to HDMI source.

Note: HDFC-200D can utilize the +5V power supplied through a HDMI pin (#18) from the HDMI source. Nonetheless, you have to confirm the power being capable to supply more than 500mA. If HDMI source doesn't supply enough power, you can make a customized order of HDFC-200D, USB power cable on TX side for supplying power (optional).

Note: Many HDMI sources, especially HDMI 2.0 products, would be able to supply sufficiently DC power to operate HDFC-200D on TX side.

Troubleshooting

The display displays only black screen.

Ensure that the HDMI ports are firmly plugged in to the HDMI source and display. Ensure that the TX and RX module plugged correctly to the HDMI source and display respectively. Ensure that blue power LEDs on TX and RX modules are on.

Check if the HDMI source and display are powered on and properly booted. Reset the system by de-plugging and re-plugging the TX HDMI port or RX HDMI port.

Re-boot up the system while connecting the optical HDMI cable system.

Screen is distorted or displays noises.

Ensure connections of both plugs while disconnecting and reconnecting the optical HDMI cables.

Maintenance

No special maintenance is required for the optical HDMI cables. Ensure that the cables and power modules are stored or used in a benign environment free from liquid or dirt contamination.

There are no user serviceable parts. Refer all service and repair issues to Opticis.

Technical Support and Service

For commercial or general product support, contact your reseller. For technical service, contact Opticis by email techsupp@opticis.com or visit our website at www.opticis.com

Product Specifications

HDFC-200D, HDMI 2.0 Detachable Active Optical Cable

- **Support HDMI 2.0 Standards**
- **Extends** up to 4K (4096x2160) at 60Hz (RGB & YCbCr : 4:4:4)
- **Transmits** HDMI 2.0 data up to 100m(328feet) over hybrid cable
- **Adopts** Plenum graded & LSZH (Low Smoke Zero Halogen) hybrid cable
- **Offers** perfect flexibility during installation by separating HDMI connector from cable
- **Prevents** accidental disconnection by using High-Retention HDMI connector
- **Operates** by external USB power on the display(RX) side
- **Provides** USB power cable on display source(TX) side for insufficient power supply(optional)

- Tensile load: 150N
 - Short Term Load 300 N for 30min
 - Long Tern Load 150N for 10min
 - Minimum bending radius: 70mm(Under Load)
(usually safe in assuming a minimum long-term low-stress radius not less than 15 times the cable diameter; EIA/TIA 568 For Fiber Optics)
 - Outer diameter of cable: 3.9x2.7mm

- **Mechanical specifications of TX and RX module parts**
 - **Dimensions:** 50.0mm / 20.0mm / 10.4mm (L/W/H)

- **Environmental Specifications**
 - Operating temperature: 0°C to 60°C
 - Storage temperature: - 20°C to 85°C
 - Humidity: 10% to 90%

Warranty Information

1 (One) Year Warranty

Opticis warrants this optical HDMI extension cable to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Opticis or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Opticis shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product.

All products that are replaced will become the property of Opticis.

Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) days warranty or the remainder of the initial warranty period, whichever is longer.

Opticis shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to Opticis for repair under warranty or not.

Warranty Limitation and Exclusion

Opticis shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Opticis or its authorized agents, causes other than from ordinary use or failure to properly use the Product in the application for which said Product is intended.

Dispose of Old Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

1-6 Warranty Information

© 2017 Opticis Co., Ltd. All Rights Reserved
Version 1.0_28, August 2017

Opticis Locations

Headquarters

Opticis Co., Ltd.
16FI, Kins Tower
8 Sungnam-daero, 331 beon-gil,
Bundang-gu,
Seongnam-si, Gyunggi-do, 13558
South Korea
Tel: +82 (31) 719-8033
Fax: +82 (31) 719-8032
www.opticis.com

Direktronik AB
Konsul Johnsons väg 15
SE-149 45 Nynäshamn
Sweden

Tel: +46 8 524 00 700

www.direktronik.se

For order support, please contact your Distributor or Reseller.

info@direktronik.se

For technical support, check with the Opticis web site www.opticis.com or contact techsupp@opticis.com